

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT  
TYPE  
PART NUMBER

## FEATURES

Adjustable long lasting, efficient ultra bright white LED lamp heads

One, 0.5 watt white LED per lamp head

Unique all inclusive lamp, reflector and lens assembly

Long-lasting, energy efficient Red or Green LED EXIT sign illumination



## SPECIFICATIONS


### BATTERY

Unique bi-color LED indicator light alerts occupant on 3.6V battery condition (Green-normal, Red-check battery). Battery powers unit for a minimum of 90 minutes. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

### MOUNTING & CONSTRUCTION

EZ-snap thermoplastic mounting canopy included – provides top or end mount. Universal knockout pattern on back plate for wall mount. Injection-molded, engineering grade, 5VA flame retardant, highimpact, thermoplastic in white or black finish.

## DIMENSIONAL INFORMATION

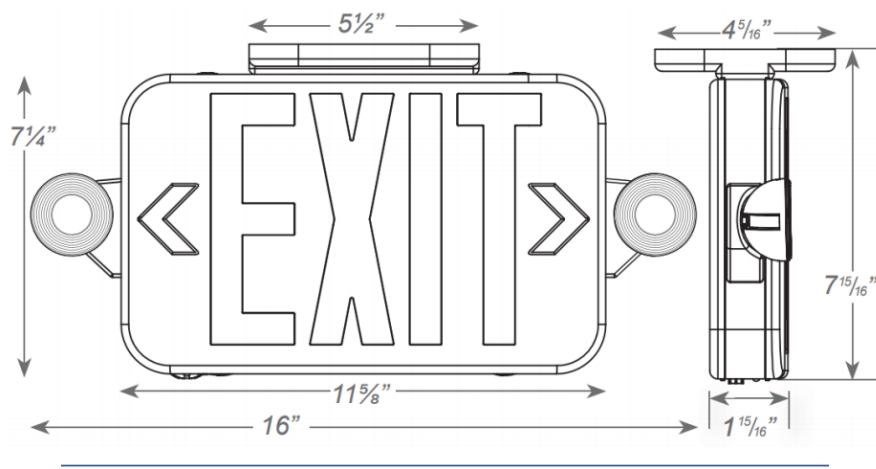

## ORDERING INFORMATION

STYLE	# OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
<b>CEU</b> FIXTURE	<b>3</b> UNIVERSAL SINGLE / DOUBLE FACE	<b>R</b> RED  <b>G</b> GREEN	<b>W</b> WHITE  <b>B</b> B	<b>RC</b> REMOTE CAPACITY  <b>SPV</b> 120-230V 50/60Hz

## ADDITIONAL GRAPHICS

