

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT  
TYPE  
PART NUMBER

## FEATURES

- Ultra low profile design can be used in a wide variety of applications
- Diverse controls compatibilities provide ease of mind in usability
- Designed for easy mounting and installation
- End to end illumination using a dependable light engine with an L70 of greater than 150,000 hours
- Expanse of light engine choices in addition to several possible options and adders
- Color Tuning and RGBW available with correlating controls packages



## SPECIFICATIONS

### CONSTRUCTION

- Pre painted white steel utilizing screw fasteners for gear tray attachment
- Several back of fixture pre punches for ease of installation

### MOUNTING & INSTALLATION

- Suspended or surface mount
- Connection brackets upon request to be used for end to end applications
- Available suspension and surface mount installation kits for various ceiling styles ; exposed, acoustical, sheet rock

### OPTICAL

- Evenly diffuse extruded acrylic lens
- Wide distribution due to wrap around curved lens
- Punched baffle for glare reduction

### ELECTRICAL

- LED Light Engine designed for reliability and long life operation
- Standard 0-10V dimming to 1% with other standards available
- 120 / 277 compatible with other voltages available


### CONTROLS

- Individual or grouping control with many brands available
- For further in depth controls integrations, please see page 2

### LISTINGS

- DesignLights Consortium qualified, see DLC QPL
- ETL safety certified for damp locations
- Standard 5 year warranty / 10 year warranty available upon request

## DIMENSIONAL INFORMATION

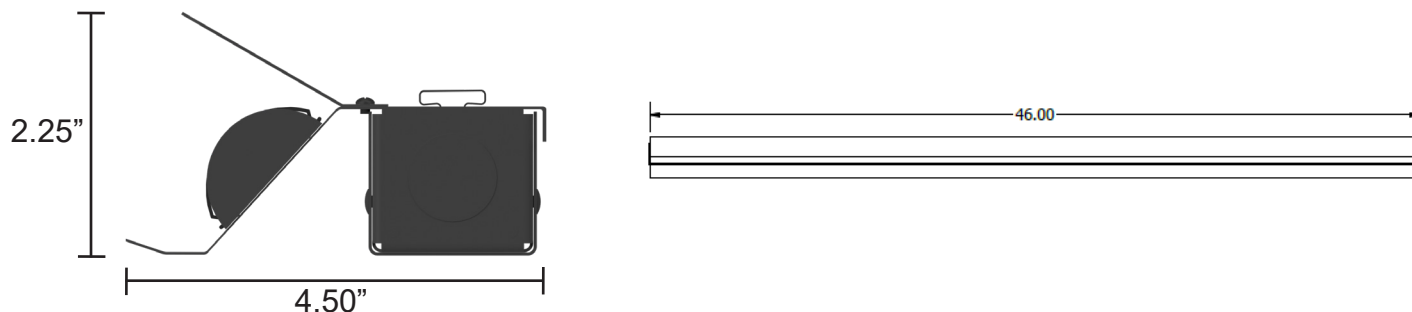

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED  
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060



## ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE		COLOR TEMP	FR-CP	OPTIONS (CONTINUED)
<b>F</b> FIXTURE	<b>14MT</b> 1' x 4'	<b>1' X 4'</b>	<b>1' X 8'</b>	<b>35</b> 3500K	<b>FR</b> FROSTED LENS	<b>SD</b> STEP DIMMING (BI LEVEL OR TRI LEVEL)
	<b>18MT</b> 1' x 8'	<b>F4X2</b> 13W 1841 LUMENS	<b>F4L7</b> 27W 3682 LUMENS	<b>40</b> 4000K	<b>CP</b> COVE LUMINAIRE	<b>LVD120 / 277</b> 120V / 277V LINE VOLTAGE DIMMING
		<b>F4X8</b> 18W 2493 LUMENS	<b>F4N6</b> 36W 4985 LUMENS	<b>50</b> 5000K		<b>D</b> PREWIRED FOR 0-10V DIMMING
		<b>F4L4</b> 24W 3262 LUMENS	<b>F4M6</b> 48W 6525 LUMENS	<b>2765</b> 2700K - 6500K (ADJUSTABLE)		<b>EM</b> EMERGENCY BACKUP INCLUDED (6W STANDARD)
		<b>F4L9</b> 29W 3950 LUMENS	<b>F4H8</b> 58W 7901 LUMENS			<b>RGBW</b> COLOR CHANGING WITH VARIOUS CONTROL OPTIONS AVAILABLE
		<b>F4N2</b> 32W 4329 LUMENS	<b>F4V4</b> 64W 8658 LUMENS			
		<b>F4N5</b> 35W 4713 LUMENS	<b>F4Y0</b> 70W 9427 LUMENS			
		<b>F4M0</b> 40W 5229 LUMENS	<b>F4Z0</b> 80W 10458 LUMENS			
					<b>CUSTOM OPTIONS</b>	

\* 2765 is only for color select options using a compatible control system

## CONTROLS INTEGRATION



USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED  
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060

