


FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT
TYPE
PART NUMBER

FEATURES

- Low profile fixture with a simple and clean aesthetic
- Diverse controls compatibilities provide ease of mind in usability
- Ideal for suspended or surface mount general lighting needs, varied options available for mounting
- End to end illumination using a dependable light engine with an L70 of greater than 150,000 hours
- Wide variety of lumen packages available
- Color Tuning and RGBW available with correlating controls packages

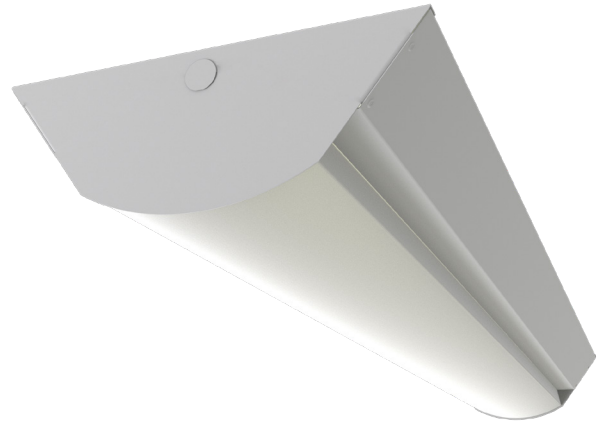

SPECIFICATIONS

CONSTRUCTION

- Pre painted white steel utilizing screw fasteners for gear tray connection
- White acrylic endcaps

MOUNTING & INSTALLATION

- Suspended or surface mount
- Connection brackets upon request to be used for end to end applications
- Installation kits available for various ceiling styles

OPTICAL

- Evenly diffuse extruded acrylic lens
- Wide distribution due to wrap around curved lens

ELECTRICAL

- LED Light Engine designed for reliability and long life operation
- Standard 0-10V dimming to 1%
- 120 - 277 V standard; 347V or 480V available



CONTROLS

- Individual or grouping control with many solutions available
- Consult factory for specific requirements

LISTINGS

- DesignLights Consortium qualified, see DLC QPL
- ETL safety certified for damp locations
- Standard 5 year warranty / 10 year warranty available upon request

DIMENSIONAL INFORMATION

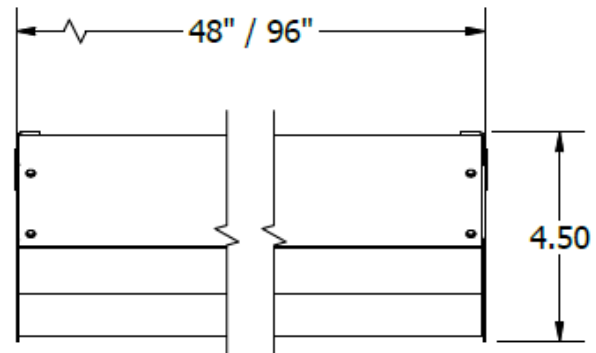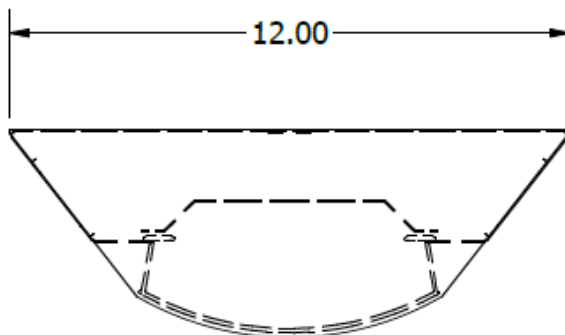

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060



ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE		COLOR TEMP	OPTIONS	OPTIONS (CONTINUED)
F FIXTURE	14CR 1' x 4'	1' X 4'	1' X 8'	35 3500K	FR FROSTED LENS (STANDARD OPTION)	SD STEP DIMMING (BI LEVEL OR TRI LEVEL)
	18CR 1' x 8'	L4L 18W 2514 LUMENS	L4VL 24W 3485 LUMENS	40 4000K	WB WIDE BODY FIXTURE	LVD120 / 277 120V / 277V LINE VOLTAGE DIMMING
	1' X 2' OPTIONS AVAILABLE	L4N 24W 3218 LUMENS	L4LL 30W 4305 LUMENS	50 5000K	CONTINUOUS ROW OPTIONS:	D PREWIRED FOR 0-10V DIMMING
		L4M 28W 3727 LUMENS	L4L 36W 5029 LUMENS	2765* 2700K - 6500K (ADJUSTABLE)		EM EMERGENCY BACKUP INCLUDED (6W STANDARD)
		L4S 33W 4234 LUMENS	L4N 48W 6554 LUMENS			RGBW COLOR CHANGING WITH VARIOUS CONTROL OPTIONS AVAILABLE
		L4MH 37W 4658 LUMENS	L4M 56W 7454 LUMENS		STR START OF ROW FIXTURE	
		L4H 48W 6554 LUMENS	L4S 66W 8468 LUMENS		MID MIDDLE OF ROW FIXTURE	
		L4V 54W 7266 LUMENS	L4MH 77W 9596 LUMENS		END END OF ROW FIXTURE	
		L4VH 60W 7889 LUMENS	L4H 96W 13108 LUMENS			
		L4VV 69W 8857 LUMENS	L4V 109W 14532 LUMENS			
			L4VH 120W 15778 LUMENS			
			L4VV 138W 17714 LUMENS			

CUSTOM OPTIONS

* 2765 is only for color select options using a compatible control system

ADDITIONAL GRAPHICS



USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060

