

# FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS



PROJECT TYPE PART NUMBER

### **FEATURES**

DLC Dual Listed as Linear Ambient and Hi/Low Bay!

150,000 hr + L70

Seoul Semiconductor LEDS

Name brand LED Drivers

Dimming option available upon request

Wide range of lumen and wattage packages available

Up to 156 lumens per watt delivered

Sensor options available upon request



# SPECIFICATIONS

# **CONSTRUCTION**

20ga. (0.036") pre-painted die formed steel with sufficient knockouts for mounting and electrical supply.

## **REFLECTOR**

Can be ordered with a 95% specular, a 85% specular, or a 92% diffuse white enamel. Substrate is 0.032" high quality Aluminum. The reflector profile is optimized using computer analysis and manufactured using state of the art CNC equipment. A protective premask is applied to all reflective surfaces prior to manufacture.

#### **FINISH**

All cold rolled steel parts are painted with a smooth, glossy, highly reflective white paint.

#### **ELECTRICAL**

LED Light Engine designed for reliability and long life operation Standard 0-10V dimming to 1%

120 - 277 V standard; 347V or 480V available

#### **CONTROLS**


Individual or grouping control with many solutions available Consult factory for specific requirements

# **LISTINGS**

DesignLights Consortium Premium qualified, see DLC QPL ETL safety certified for damp locations

Standard 5 year warranty / 10 year warranty available upon request

#### **DIMENSIONAL INFORMATION**

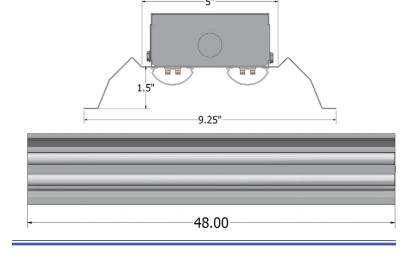











#### ORDERING INFORMATION -

STYLE	SIZE
<b>F</b>	<b>14VX</b>
FIXTURE	1' x 4'
<b>K</b>	<b>18VX</b>
RETROFIT KIT	1' x 8'

1' X 2' OPTIONS AVAILABLE

REFLECTOR MATERIAL
WR
WHITE REFLECTOR

# R

# LIGHT ENGINE (NO LENS / FROSTED LENS)

N4M4G4HO 44W 6898 LUMENS

1' X 4'

6240 LUMENS **N4H3G4HO** 53W

8293 LUMENS 7502 LUMENS

**N4H7G4HO** 57W 8902 LUMENS 8053 LUMENS

**N4V7G4HO** 67W 10424 LUMENS 9429 LUMENS

N4YOG4HO 70W 10892 LUMENS 9853 LUMENS 1' X 8'

N4Z8G4HO 88W 13796 LUMENS 12480 LUMENS

N4116G4HO 106W 16586 LUMENS 15004 LUMENS

N41X4G4HO 114W 17804 LUMENS 16106 LUMENS

N41N4G4HO 134W 20847 LUMENS 18859 LUMENS

N41M0G4HO 140W 21784 LUMENS 19627 LUMENS COLOR TEMP

> **35** 3500K

**40** 4000K

5000K **2765\*** 

2765\* 2700K - 6500K (ADJUSTABLE **OPTIONS** 

**FR** FROSTED LENS

D

PREWIRED FOR 0-10V DIMMING

BC

BALLAST COVER REFLECTOR

OBS

ON BOARD SENSOR

EM

EMERGENCY DRIVER

**RGBW** 

COLOR CHANGING WITH VARIOUS CONTROL OPTIONS AVAILABLE

CUSTOM OPTIONS

\* 2765 is only for color select options using a compatible control

# **ADDITIONAL GRAPHICS**









