

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT
TYPE
PART NUMBER

FEATURES

- Ultra low profile design can be used in a wide variety of applications
- Diverse controls compatibilities provide ease of mind in usability
- Multiple options for easy mounting and installation including end to end row options
- End to end illumination using a dependable light engine with an L70 of greater than 150,000 hours
- Wide variety of lumen packages available
- Color Tuning and RGBW available with correlating controls packages



SPECIFICATIONS

CONSTRUCTION

- Pre painted white steel utilizing screw fasteners for gear tray attachment
- Several back of fixture pre punches for ease of installation

MOUNTING & INSTALLATION

- Suspended or surface mount
- Installation kits available for various ceiling styles
- Connection bracket provided for end to end mounting

OPTICAL

- Evenly diffuse extruded acrylic lens
- Wide distribution due to wrap around curved lens

ELECTRICAL

- LED Light Engine designed for reliability and long life operation
- Standard 0-10V dimming to 1%
- 120 - 277 V standard


CONTROLS

- Individual or grouping control with many solutions available
- Consult factory for specific requirements

LISTINGS

- DesignLights Consortium qualified, see DLC QPL
- ETL safety certified for damp locations
- Standard 5 year warranty / 10 year warranty available upon request

DIMENSIONAL INFORMATION

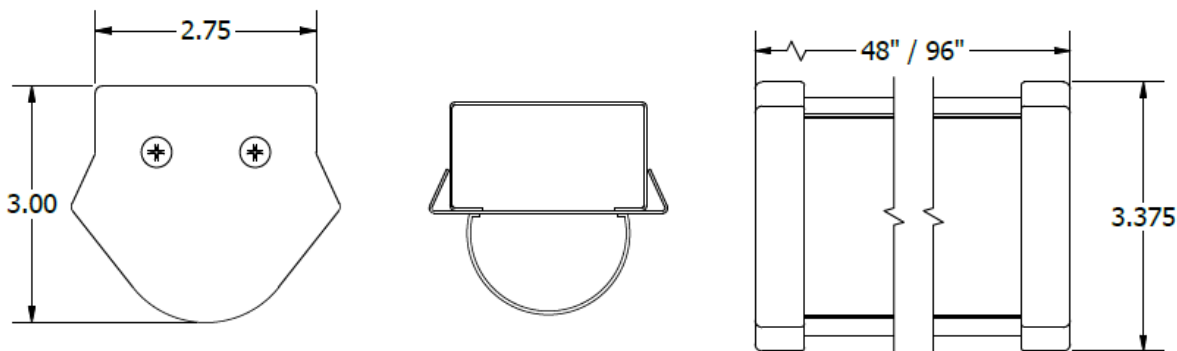

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060



ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE		COLOR TEMP	FR-ROW	OPTIONS	OPTIONS (CONTINUED)
F FIXTURE	14MT 1' x 4'	F4X2 13W 1841 LUMENS	F4L7 27W 3682 LUMENS	35 3500K	FR-ROW	FR FROSTED LENS	SD STEP DIMMING (BI LEVEL OR TRI LEVEL)
	18MT 1' x 8'	F4X8 18W 2493 LUMENS	F4N6 36W 4985 LUMENS	40 4000K		ROW ROW CAPABLE FIXTURE	LVD120 / 277 120V / 277V LINE VOLTAGE DIMMING
	1' x 2' OPTIONS AVAILABLE	F4L4 24W 3262 LUMENS	F4M6 48W 6525 LUMENS	50 5000K		SAL STANDALONE FIXTURE	D PREWIRED FOR 0-10V DIMMING
		F4L9 29W 3950 LUMENS	F4H8 58W 7901 LUMENS	2765 2700K - 6500K (ADJUSTABLE)		CONTINUOUS ROW OPTIONS:	EM EMERGENCY BACKUP INCLUDED (6W STANDARD)
		F4N2 32W 4329 LUMENS	F4V4 64W 8658 LUMENS			STR START OF ROW FIXTURE	RGBW COLOR CHANGING WITH VARIOUS CONTROL OPTIONS AVAILABLE
		F4N5 35W 4713 LUMENS	F4Y0 70W 9427 LUMENS			MID MIDDLE OF ROW FIXTURE	
		F4M0 40W 5229 LUMENS	F4Z0 80W 10458 LUMENS			END END OF ROW FIXTURE	
CUSTOM OPTIONS							

* 2765 is only for color select options using a compatible control system

ADDITIONAL GRAPHICS



USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060

