

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT  
TYPE  
PART NUMBER

## FEATURES

- Low profile fixture with a simple and clean aesthetic
- Diverse controls compatibilities provide ease of mind in useability
- Ideal for surface mount stairwell lighting
- End to end illumination using a dependable light engine with an L70 of greater than 150,000 hours
- Wide variety of lumen packages available
- Color Tuning and RGBW available with correlating controls packages



## SPECIFICATIONS

### CONSTRUCTION

- Pre painted white steel utilizing screw fasteners for gear tray connection
- White acrylic end caps

### MOUNTING & INSTALLATION

- Surface mount only
- Connection brackets upon request to be used for end to end applications
- Installation kits available for various wall styles

### OPTICAL

- Evenly diffuse extruded acrylic lens
- Wide distribution due to wrap around curved lens

### ELECTRICAL

- LED Light Engine designed for reliability and long life operation
- Standard 0-10V dimming to 1%
- 120 - 277 V standard; 347V or 480V available


### CONTROLS

- Individual or grouping control with many solutions available
- Consult factory for specific requirements

### LISTINGS

- DesignLights Consortium qualified, see DLC QPL
- ETL safety certified for damp locations
- Standard 5 year warranty

## DIMENSIONAL INFORMATION

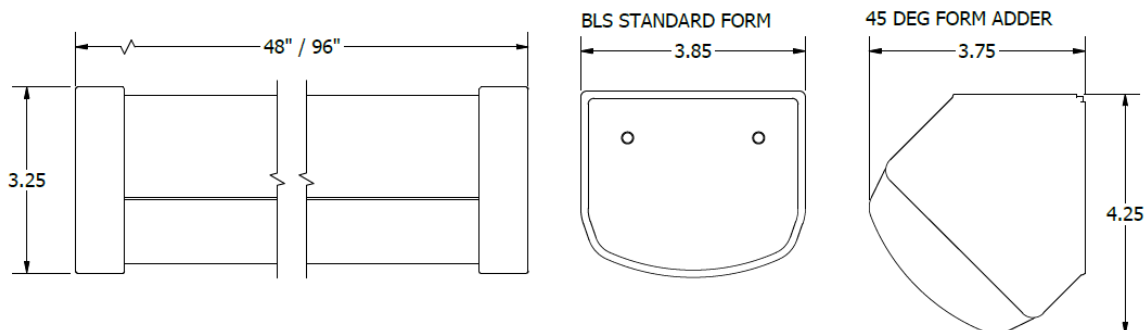

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED  
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • [WWW.ESILIGHTING.COM](http://WWW.ESILIGHTING.COM) • (651) 268 - 6060




## ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE		COLOR TEMP	FR-BLS	OPTIONS	OPTIONS (CONTINUED)
<b>F</b> FIXTURE	<b>14CE</b> 1' x 4'	<b>1' X 4'</b>	<b>1' X 8'</b>	<b>35</b> 3500K	<b>FR-BLS</b>	<b>FR</b> FROSTED LENS (STANDARD OPTION)	<b>SD</b> STEP DIMMING (BI LEVEL OR TRI LEVEL)
	<b>18CE</b> 1' x 8'	<b>F4X2H</b> 13W 1863 LUMENS	<b>F4L6H</b> 26W 3726 LUMENS	<b>40</b> 4000K		<b>BLS</b> BI LEVEL SENSOR FOR STAIRWELLS	<b>LVD120 / 277</b> 120V / 277V LINE VOLTAGE DIMMING
	1' X 2' OPTIONS AVAILABLE	<b>F4X8H</b> 18W 2532 LUMENS	<b>F4N6H</b> 36W 5064 LUMENS	<b>50</b> 5000K		<b>45</b> CE 45 DEGREE BODY	<b>D</b> PREWIRED FOR 0-10V DIMMING
		<b>F4L4H</b> 24W 3308 LUMENS	<b>F4M6H</b> 48W 6616 LUMENS	<b>2765*</b> 2700K - 6500K (ADJUSTABLE)			<b>EM</b> EMERGENCY BACKUP INCLUDED (6W STANDARD)
		<b>F4L9H</b> 29W 4000 LUMENS	<b>F4H8H</b> 58W 7999 LUMENS				<b>RGBW</b> COLOR CHANGING WITH VARIOUS CONTROL OPTIONS AVAILABLE
		<b>F4N2H</b> 32W 4375 LUMENS	<b>F4V4H</b> 64W 8750 LUMENS				
		<b>F4N5H</b> 35W 4759 LUMENS	<b>F4Y0H</b> 70W 9518 LUMENS				
		<b>F4N9H</b> 39W 5288 LUMENS	<b>F4Y9H</b> 79W 10576 LUMENS				
		<b>F4M8H</b> 49W 6432 LUMENS	<b>F4C5H</b> 98W 12864 LUMENS			<b>CUSTOM OPTIONS</b>	

\* 2765 is only for color select options using a compatible control system

## ADDITIONAL GRAPHICS

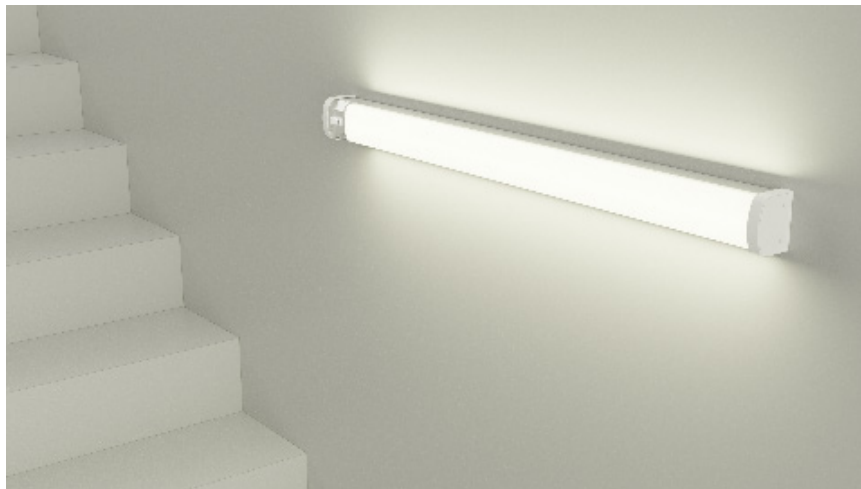

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED  
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060

