



Energy Solutions
INTERNATIONAL, INC.

VXHO
GOLD

LED High Output Strip Fixture and Retrofit Kit

TYPE	PROJECT NAME	DATE

FEATURES


- DLC Dual Listed as Linear Ambient and Hi/Low Bay!
- 150,000 hr + L70
- Seoul Semiconductor LEDs
- Name brand LED Drivers
- Dimming option available upon request
- Wide range of lumen and wattage packages available
- Up to 156 lumens per watt delivered
- Sensor options available upon request

TECHNICAL INFORMATION

- **Housing:** 20ga. (0.036") pre-painted die formed steel with sufficient knockouts for mounting and electrical supply.
- **LEDs:** Best efficacy of mid level power LEDs, 80+ CRI, utilizes aluminum substrate to provide a advanced thermal management system.
- **Reflector:** Can be ordered with a 95% specular, a 85% specular, or a 92% diffuse white enamel. Substrate is 0.032" high quality Aluminum. The reflector profile is optimized using computer analysis and manufactured using state of the art CNC equipment. A protective premask is applied to all reflective surfaces prior to manufacture.
- **Construction:** The solid 0.032" steel body provides added rigidity. The socket bars and end-plates securely snap into place. The reflectors are attached to the fixture body with a tab-lock/ quarter-turn system.
- **Finish:** All cold rolled steel parts are painted with a smooth, glossy, highly reflective white paint.



INSTALLATION POINTS

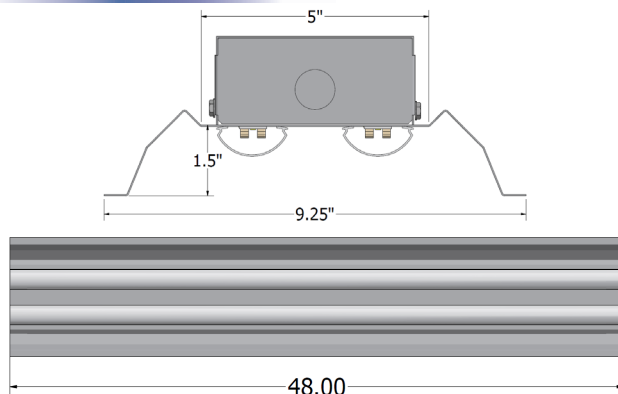

MADE IN THE USA

VXHO 17001

Part Number = Style + Size + Light Engine + Color Temperature + Options
 (Example: F-14VX-WR-N4H7G4HO-40-FR = 1x4 VXG4HO Series Fixture with a 57W Light engine,
 4000K Color temp and a Frosted Lens)

STYLE	SIZE	LIGHT ENGINE (No Lens / Frosted Lens)	COLOR TEMP.	OPTIONS
K - RETROFIT KIT	14VX - 1' X 4'	N4M4G4HO - 4' - 44W - 6898 / 6240 LUMENS	35 - 3500K	FR - FROSTED LENS
F - NEW FIXTURE	18VX - 1' X 8'	N4H3G4HO - 4' - 53W - 8293 / 7502 LUMENS	40 - 4000K	EM - EMERGENCY DRIVER
		N4H7G4HO - 4' 57W 8902 / 8053 LUMENS	50 - 5000K	
		N4V7G4HO - 4' 67W 10424 / 9429 LUMENS		
		N4YOG4HO - 4' 70W 10892 / 9853 LUMENS		
		N4Z8G4HO - 8' 88W 13796 / 12480 LUMENS		
		N4I16G4HO - 8' 106W 16586 / 15004 LUMENS		
		N4IX4G4HO - 8' 114W 17804 / 16106 LUMENS		
		N4IN4G4HO - 8' 134W 20847 / 18859 LUMENS		
		N4IM0G4HO - 8' 140W 21784 / 19627 LUMENS		

CONTROLS CAPABILITIES

"All products are IoT-Ready!"



OCCUPANCY / VACANCY



GROUPING



DIMMING



DAYLIGHT HARVESTING



SCHEDULING



NETWORKED LIGHTING CONTROLS