

FEATURES

- Low profile fixture with a simple and clean aesthetic
- Diverse controls compatibilities provide ease of mind in useability
- Ideal for retrofitting linear channels in surface mount or suspended conditions
- End to end illumination using a dependable light engine with an L70 of greater than 150,000 hours
- Wide variety of lumen packages available
- Color Tuning and RGBW available with correlating controls packages



SPECIFICATIONS

CONSTRUCTION

- Pre painted white aluminium heat sink with white steel bracketry
- White acrylic endcaps

MOUNTING & INSTALLATION

- Bracket set mounted into existing fixture
- 47.1875" standard quarter turn spacing on heat sink

OPTICAL

- Evenly diffuse extruded acrylic lens
- Wide distribution due to wrap around curved lens

ELECTRICAL

- LED Light Engine designed for reliability and long life operation
- Standard 0-10V dimming to 1%
- 120 - 277 V standard; 347V or 480V available



CONTROLS

- Individual or grouping control with many solutions available
- Consult factory for specific requirements

LISTINGS

- DesignLights Consortium qualified, see DLC QPL
- ETL safety certified for damp locations
- Standard 5 year warranty

DIMENSIONAL INFORMATION

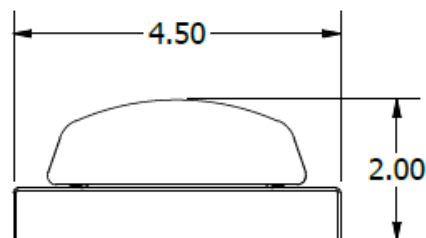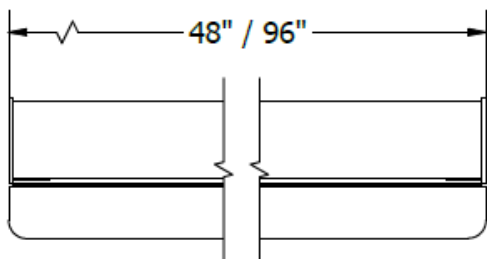


ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE		COLOR TEMP	FR	OPTIONS (CONTINUED)
K KIT	14CE 1' x 4'	1' X 4'	1' X 8'	35 3500K	FR FROSTED LENS (STANDARD OPTION)	SD STEP DIMMING (BI LEVEL OR TRI LEVEL)
	18CE 1' x 8'	F4X2H 13W 1863 LUMENS	F4L6H 26W 3726 LUMENS	40 4000K		LVD120 / 277 120V / 277V LINE VOLTAGE DIMMING
	1' X 2' OPTIONS AVAILABLE	F4X8H 18W 2532 LUMENS	F4N6H 36W 5064 LUMENS	50 5000K		D PREWIRED FOR 0-10V DIMMING
		F4L4H 24W 3308 LUMENS	F4M6H 48W 6616 LUMENS	2765* 2700K - 6500K		EM EMERGENCY BACKUP INCLUDED (6W STANDARD)
		F4L9H 29W 4000 LUMENS	F4H8H 58W 7999 LUMENS			CT COLOR SELECT WITH VARIOUS CONTROL OPTIONS AVAILABLE
		F4N2H 32W 4375 LUMENS	F4V4H 64W 8750 LUMENS			CONTROL OPTIONS AVAILABLE CONSULT FACTORY
		F4N5H 35W 4759 LUMENS	F4Y0H 70W 9518 LUMENS			
		F4N9H 39W 5288 LUMENS	F4Y9H 79W 10576 LUMENS			
		F4M8H 49W 6432 LUMENS	F4C5H 98W 12864 LUMENS			
					CUSTOM OPTIONS	

* 2765 is only for color select options using a compatible control system

ADDITIONAL GRAPHICS

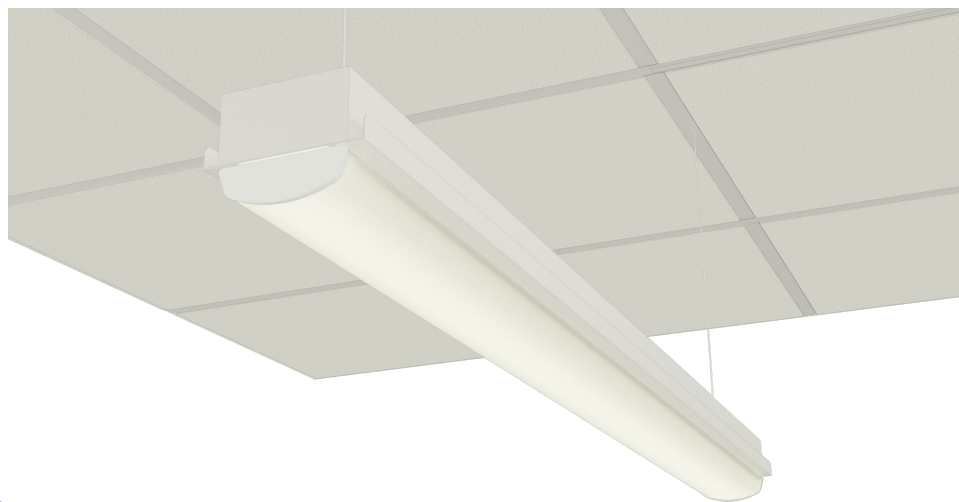

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060

