

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT
TYPE
PART NUMBER

FEATURES

- Shallow depth construction provides for a simple install on both retrofit and new fixture applications
- Diverse controls compatibilities provide ease of mind in useability
- Simple and light aluminum construction provide increased efficiency of installation
- End to end illumination using a dependable light engine with an L70 of greater than 150,000 hours
- Wide variety of lumen packages available
- Color Tuning and RGBW available with correlating controls packages



SPECIFICATIONS

CONSTRUCTION

- Pre painted white aluminum utilizing screw fasteners and locking tabs
- Matte finish reflector reduces glare

MOUNTING & INSTALLATION

- Lay-in fixture design with back mounted access plate
- Multi piece retrofit kit installs easily with detached reflector design
- Options available for air handling
- Compatibility with non standard grid styles upon request

OPTICAL

- Evenly diffuse extruded acrylic lens
- Shallow volumetric design with matte finish reflector

ELECTRICAL

- LED Light Engine designed for reliability and long life operation
- Standard 0-10V dimming to 1%
- 120 - 277 V standard


CONTROLS

- Individual or grouping control with many solutions available
- Consult factory for specific requirements

LISTINGS

- DesignLights Consortium Premium qualified, see DLC QPL
- ETL safety certified for damp locations
- Standard 5 year warranty / 10 year warranty available upon request

DIMENSIONAL INFORMATION

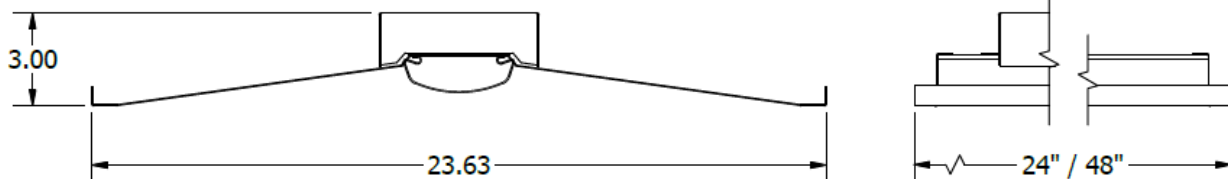

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060



ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE			COLOR TEMP	OPTIONS	OPTIONS (CONTINUED)
K KIT	14LE 1' x 4'	1' X 4'	2' X 2'	2' X 4'	35 3500K	FR FROSTED LENS	SD STEP DIMMING (BI LEVEL OR TRI LEVEL)
F FIXTURE	22LE 2' x 2'	F4X5 16W 2261 LUMENS	L2X6 16W 2203 LUMENS	F4L0 22W 3277 LUMENS	40 4000K	SQ SQUARE FROSTED LENS	LVD120 / 277 120V / 277V LINE VOLTAGE DIMMING
	24LE 2' x 4'	F4L0 20W 2758 LUMENS	L2X8 18W 2520 LUMENS	F4L5 25W 3697 LUMENS	50 5000K	DF DOOR FRAME KIT (PRISMATIC LENS REPLACEMENT) (DIMENSIONS NEEDED)	D PREWIRED FOR 0-10V DIMMING
		F4L5 25W 3434 LUMENS	L2L2 22W 3087 LUMENS	F4L8 28W 4092 LUMENS	2765 2700K - 6500K (ADJUSTABLE)	AH AIR HANDLING (AIR RETURN SLOTS)	EM EMERGENCY BACKUP INCLUDED (6W STANDARD)
		F4L8 28W 3817 LUMENS	L2L4 24W 3364 LUMENS	F4N2 32W 4644 LUMENS		DL DUAL LENS DESIGN	RGBW COLOR CHANGING WITH VARIOUS CONTROL OPTIONS AVAILABLE
		F4N2 32W 4356 LUMENS	L2L8 28W 3922 LUMENS	F4N6 36W 5192 LUMENS		SM SURFACE MOUNT	
		F4N6 36W 4896 LUMENS	L2N0 30W 4198 LUMENS	F4M0 40W 5763 LUMENS			
		F4M0 41W 5515 LUMENS	L2N5 33W 4538 LUMENS				
CUSTOM OPTIONS							

* 2765 is only for color select options using a compatible control system

ADDITIONAL GRAPHICS



USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060

