

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT
TYPE
PART NUMBER

FEATURES

- Calculated L70 life in excess of 100K hours
- Wet location enclosure
- Utilizes Philips Fortimo LED Modules and Xitanium drivers
- Wide range of constant current outputs available
- 3000K CCT meets International Dark Sky Association recommendation for outdoor lighting



SPECIFICATIONS

HOUSING

Die cast aluminum housing & hinged front frame, 1/2" coin plugs with O-rings for conduit & photocell. Textured architectural bronze powdercoat finish over a chromate conversion coating.

ELECTRICAL

LED Light Engine designed for reliability and long life operation
Standard 0-10V dimming to 1%
120 - 277 V standard; 347V or 480V available


CONTROLS

Individual or grouping control with many solutions available
Consult factory for specific requirements

LISTINGS

DesignLights Consortium Premium qualified, see DLC QPL
ETL safety certified for damp locations
Standard 5 year warranty / 10 year warranty available upon request

DIMENSIONAL INFORMATION

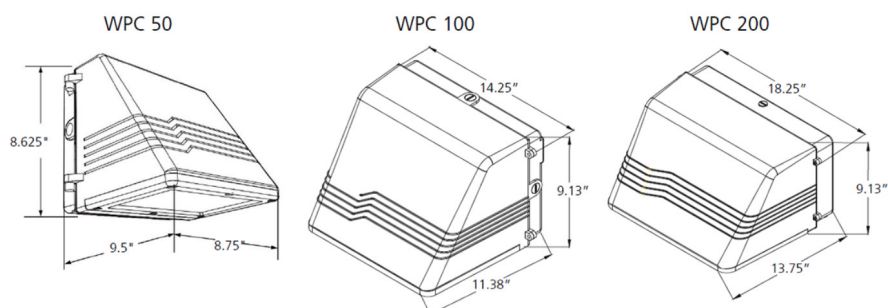

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060



ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE			COLOR TEMP	OPTIONS
F FIXTURE	WPC50	WPC50	WPC100	WPC200	30 3000K	D DIMMING
	WPC100	F3N 10W 1156 LUMENS	F3N 29W 3333 LUMENS	F5N 49W 6381 LUMENS	35 3500K	PC PHOTOCELL
	WPC200	F4N 14W 1614 LUMENS	F4H 40W 4547 LUMENS	F6N 60W 7725 LUMENS	40 4000K	EM EMERGENCY BACKUP
		F4H 17W 2016 LUMENS		F7N 70W 8942 LUMENS	50 5000K	
				F8N 83W 10460 LUMENS		

CUSTOM
OPTIONS

ADDITIONAL GRAPHICS

