

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT
TYPE
PART NUMBER

FEATURES

- Suitable for Wet or Washdown Applications
- Superior light quality and photometric efficiency
- Constant current platform offers superior efficacy
- Philips Xitanium LED Drivers & Philips Fortimo LED Boards
- 170,000 hour L70 life
- Controls compatible
- Corrosion-resistant stainless steel latches are standard



SPECIFICATIONS

CONSTRUCTION

5VA rated fiberglass composite housing

LENS

100% virgin impact resistant acrylic. Available in polycarbonate for high abuse environments or with a DR blend for maximum chemical resistance.

CONSTRUCTION

No tools are required for ballast access. Captive stainless steel latches secure the lens.

MOUNTING

Stainless hanging straps allow easy fixture installation without drilling through the enclosure.

ELECTRICAL

LED Light Engine designed for reliability and long life operation

Standard 0-10V dimming to 1%

120 - 277 V standard; 347V or 480V available

CONTROLS

Individual or grouping control with many solutions available

Consult factory for specific requirements



LISTINGS

DesignLights Consortium Premium qualified, see DLC QPL

ETL safety certified for damp locations

Standard 5 year warranty / 10 year warranty available upon request

DIMENSIONAL INFORMATION

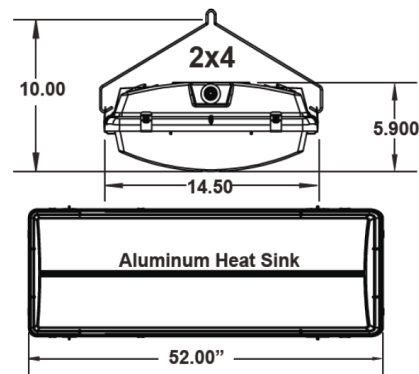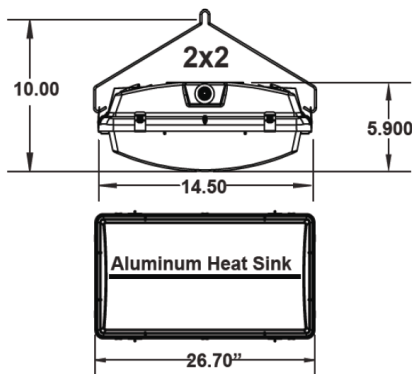

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060





ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE		COLOR TEMP	BX	STANDARD	OPTIONS
F FIXTURE	22VA 2' x 2'	2' X 2'	2' X 4'	35 3500K	BX INDIVIDUALLY BOXED		D DIMMING
	24VA 2' x 4'	F2L 44W 5571 LUMENS	F4L 100W 12480 LUMENS	40 4000K			OBS ON BOARD SENSOR
		F2N 55W 6732 LUMENS	F4N 130W 15216 LUMENS	50 5000K			V V HANGERS
		F2M 70W 8855 LUMENS	F4M 155W 19183 LUMENS				Y Y TOGGLE HANGERS
		F2H 85W 10300 LUMENS	F4H 181W 21648 LUMENS				FR FROSTED LENS
		F2V 95W 11084 LUMENS	F4V 190W 22169 LUMENS				CL CLEAR LENS

Light engines represent clear lens option,
contact factory for frosted lens data

**CUSTOM
OPTIONS**

ADDITIONAL GRAPHICS



LUMEN SUMMARY				
ZONE	LUMENS	% FIXTURE	ZONE	LUMENS
0 - 30	2970	26.8	90 - 120	0
0 - 40	4905	44.3	90 - 130	0
0 - 60	8791	79.3	90 - 150	0
0 - 90	11010	99.3	90 - 180	0
TOTAL LUMINAIRE =				11082

IES SPACING CRITERIA : END = 1.3 DIAGONAL = 1.3 CROSS = 1.3



USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060

