

TYPE	PROJECT NAME	DATE




FEATURES

- Energy efficient replacement from fluorescent technology
- 150,000 hr + L70
- Seoul Semiconductor LEDs
- Name brand LED Drivers
- Dimming option available upon request
- Wide range of lumen and wattage packages available
- 120 – 142 lumens per watt delivered
- Suited for damp locations
- Valence / Cove applications
- Existing linear applications

TECHNICAL INFORMATION

- **Housing:** 20ga. (0.036") pre-painted die formed steel with sufficient knockouts for mounting and electrical supply.
- **LEDs:** Best efficacy of mid level power LEDs, 80+ CRI, utilizes aluminum substrate to provide a advanced thermal management system.
- **Reflector:** Can be ordered with a 95% specular, a 85% specular, or a 92% diffuse white enamel. Substrate is 0.032" high quality Aluminum. The reflector profile is optimized using computer analysis and manufactured using state of the art CNC equipment. A protective premask is applied to all reflective surfaces prior to manufacture.
- **Construction:** The solid 0.032" steel body provides added rigidity. The socket bars and endplates securely snap into place. The reflectors are attached to the fixture body with a tab-lock / quarter-turn system.
- **Finish:** All Metal parts are painted with a smooth, glossy, highly

DIMENSIONAL INFORMATION

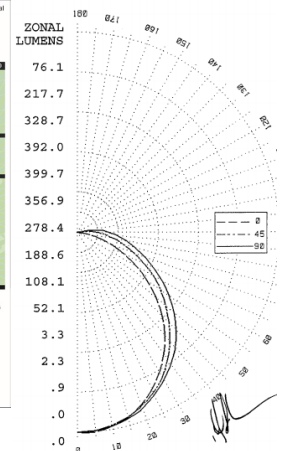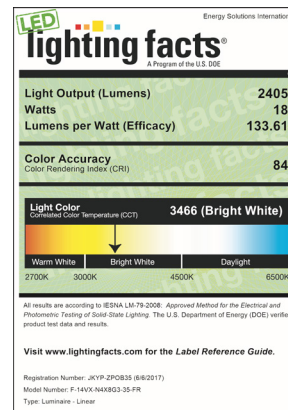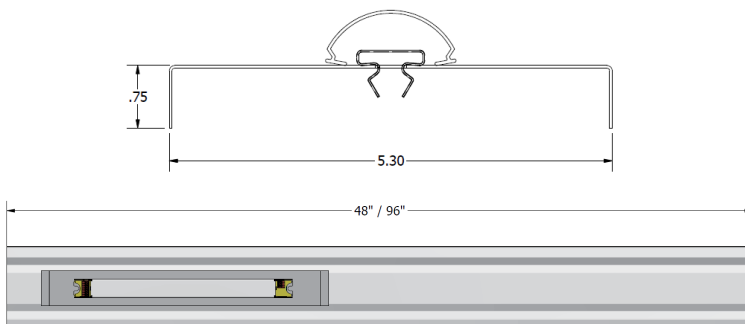

Part Number = Style + Size + Light Engine + Color Temperature + Options

(Example: K-14VX-N4N3G3-40-FR = 1'x4' VX Retrofit Kit at 33 Watts with 4000K color temp and a Frosted Lens)

STYLE	SIZE	LIGHT ENGINE 1x4 1 Strip	COLOR TEMP.	OPTIONS
K - RETROFIT KIT	14VX - 1' X 4'	N4X8G3 - 4' - 18W - 2405 LUMENS	35 - 3500K COLOR TEMP	BC-FR - FROSTED LENS
F - NEW FIXTURE	18VX - 1' X 8'	N4L3G3 - 4' - 23W - 3049 LUMENS	40 - 4000K COLOR TEMP	BC-D - 0-10V DIMMING
		N4L8G3 - 4' - 28W - 3623 LUMENS	50 - 5000K COLOR TEMP	BC-SD - STEP DIM
		N4N3G3 - 4' - 33W - 4168 LUMENS		BC-LVD - LINE VOLTAGE DIMMING
		N4N6G3 - 4' - 36W - 4429 LUMENS		BC-OBS - ON BOARD SENSOR
		N4M0G3 - 4' - 40W - 4846 LUMENS		BC-EM - EMERGENCY DRIVER
		N4L3G3 - 8' - 23W - 3197 LUMENS		
		N4L8G3 - 8' - 28W - 3844 LUMENS		
		N4N5G3 - 8' - 35W - 4810 LUMENS		
		N4M5G3 - 8' - 45W - 5941 LUMENS		
		N4M6G3 - 8' - 46W - 6099 LUMENS		
		N4H6G3 - 8' - 56W - 7247 LUMENS		
		N4V7G3 - 8' - 67W - 8336 LUMENS		
		N4Y4G3 - 8' - 74W - 9028 LUMENS		
		N4Z1G3 - 8' - 81W - 9692 LUMENS		

CONTROLS CAPABILITIES

"All products are IoT-Ready!"



OCCUPANCY / VACANCY



GROUPING



DIMMING



DAYLIGHT HARVESTING



SCHEDULING



NETWORKED LIGHTING CONTROLS